

 \equiv


OWELL 7 852

855 ME

DRAWN BY: [i] PLAN REL.DATE: 3-12-99

PLAN #

SHEET No. <u>8</u> OF <u>15</u>

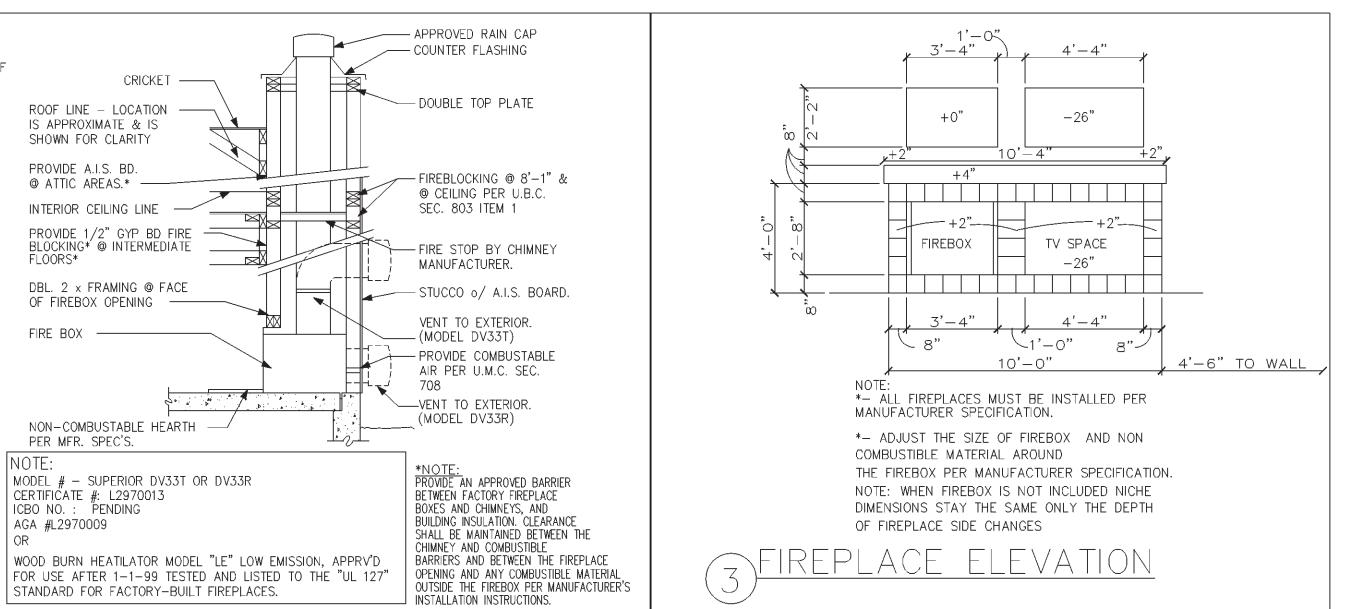

─1/2" GYP. BD. INSIDE LIVING AREA, OR 2 LAYERS 5/8" TYPE "X" GYP.BD INSIDE GARAGE

SCALE: 1/4'' = 1'-0''

(2) FIREPLACE DETAILS

EXTEND STUCCO "CHIMNEY" IN GLENDALE ONLY

MIN. 3" CLEARANCE TO 🗸

PROJECTION OF 2 1/2"

OR LESS. MAINTAIN 12" FROM ANY

PROJECTIONS EXCEEDING

FIREPLACE ONLY ----

SIDE VENT W/ GAS

ANY COMBUSTIBLE

2 1/2"

GAS FIREPLACE VENT NOTES:

1. VENT MAY NOT BE LOCATED WITHIN 9 INCHES OF DOOR OR WINDOW.

MIN. CLEARANCE ABOVE GRADE, VERANDA, PORCH OR BALCONY IS 12 INCHES

5. CLEARANCE TO OUTSIDE CORNER IS A MIN. OF 9 INCHES.

4. CLEARANCE TO INSIDE CORNER IS A MIN. OF 6 INCHES.

5. VENT MAY NOT BE INSTALLED ABOVE A GAS METER/ REGULATORY ASSEMBLY OR WITHIN 3 FEET HORIZONTALLY FROM THE CENTER LINE OF THE REGULATOR.

6. VENT CLEARANCE TO ADJACENT AIR SUPPLY INLETS SHALL BE A MIN. OF 9 INCHES FOR A NON-MECHANICAL INLET AND 6 FEET FROM A MECHANICAL AIR SUPPLY.

7. CLEARANCE UNDER VERANDA, PORCH, DECK OR BALCONY WHERE FULLY OPEN ON A MIN. OF TWO (2) SIDES BENEATH THE FLOOR SHALL

8. FOR GAS LOG FIREPLACES, BLOCK OPEN THE DAMPER PER UMC 901

AGA #L2970009 WOOD BURN HEATILATOR MODEL "LE" LOW EMISSION, APPRV'D FOR USE AFTER 1-1-99 TESTED AND LISTED TO THE "UL 127"

© COPYRIGHT 1999 WINDAMERE HOMES